
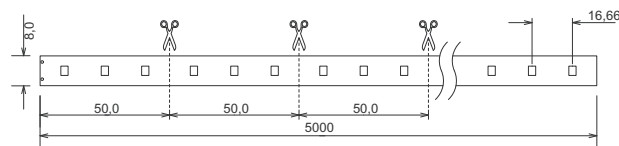


LED 12V_(DC)


Flexible Leiterplatte mit SMD-PLCC2-LED, Rollenlänge 5 m
PCB with SMD-PLCC2-LED, roll length 5 m

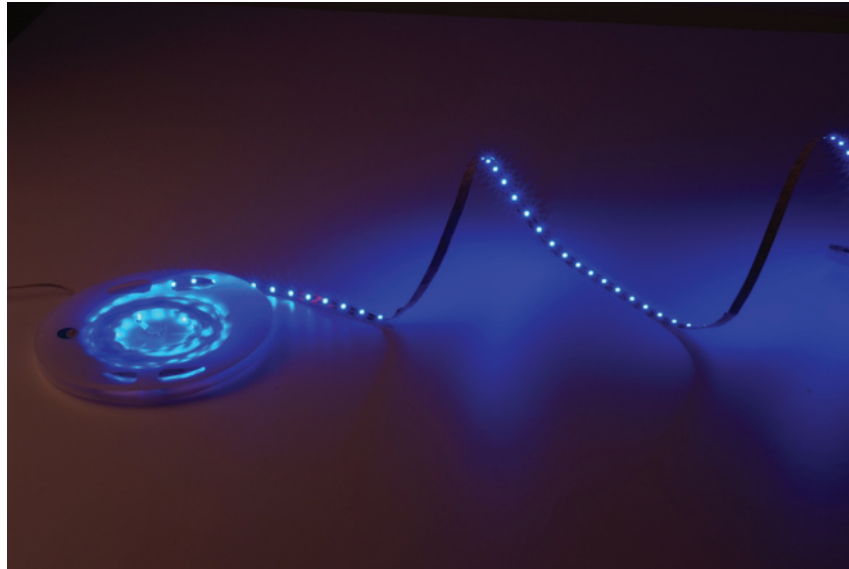

Rückseitig mit 3M-Klebeband
with 3M-adhesive tape on back side

IP
00 +60°C
-30°C

Abmessungen dimensions	Anzahl LED LED quantity	Eingangs- spannung input tension	Nennleis- tung rated power	Abstrahl- winkel beam angle	Artikelnummer ref.-No.	LED-Farbe LED-colour
5000 x 8,0 x 3,5 mm	300 (60 / m)	12 Vdc	5,0 W / m	120°	551-225-..	50 54 55 58 59 70

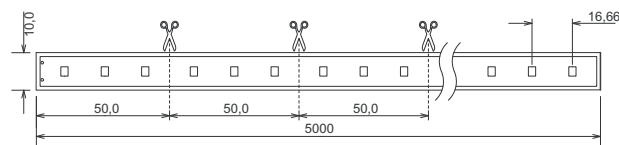

IP
65 +60°C
-30°C

Abmessungen dimensions	Anzahl LED LED quantity	Eingangs- spannung input tension	Nennleis- tung rated power	Abstrahl- winkel beam angle	Artikelnummer ref.-No.	LED-Farbe LED-colour
5000 x 10,0 x 4,0 mm	300 (60 / m)	12 Vdc	5,0 W / m	120°	551-239-..	50 54 55 58 59 70

ACHTUNG: Bei Trennung der Leiterplatte ist der Installateur für die Einhaltung der Schutzart IP 65 verantwortlich!
ATTENTION: After cutting the PCB the installer is responsible for resisting level of IP65!