

# RAMINKO

IP 43 / 23


**Use:** For public illumination of communications, pedestrian zones, gardens and parks, residential blocks.

**Technical description:** Body and cover are made of prepreg (polypropylene hardened with glass fibres). Optical cover from PMMA. Reflector from clad, anodized or chemically polished Al sheet. Electric parts incl. fuse 2 A are fixed in the body. Sealing from microporous rubber. By some types, bracket 2-99.5581 for fixing on wall is also a part of delivery. Versions of luminaires: A, B, C, D, E (see table). Luminaire is fixed on pole bracket  $\varnothing$  60 mm. Max. section of connecting conductors 2.5 mm<sup>2</sup>.

**Accessories** (on order): element 3-99.6026 for fixing on a shaft of pole, bracket 3-99.10222 for fixing on wall, bracket 4-99.10230 for fixing on concrete pole.

**Spare parts** (on order): clear cover 4-99.8105/1.

Types	Recommended light source			Weight (kg)
444 19 70	HP sodium disch. lamp	NAV	70	7.5
444 19 71	HP mercury vap. lamp	HQL	80	7.0
444 19 72	HP mercury vap. lamp	HQL	125	7.5

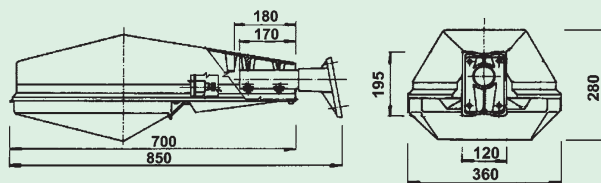

Versions:	Reflector 164.5004	Reflector 164.2540	Reflector 255.5088	Holder 2-99.5581	Blind plug 451.2674
	chem. polished	anodized	anodized		
444 19 70	+	-	-	+	+
444 19 71	+	-	-	+	+
444 19 72	+	-	-	+	+
444 19 70 A	-	+	-	+	+
444 19 70 B	-	-	+	+	+
444 19 70 C	+	-	-	-	-
444 19 71 C	+	-	-	-	-
444 19 72 C	+	-	-	-	-
444 19 70 D	-	+	-	-	-
444 19 71 D	-	+	-	-	-
444 19 72 D	-	+	-	-	-
444 19 70 E	-	-	+	-	-
444 19 71 E	-	-	+	-	-
444 19 72 E	-	-	+	-	-



# CITY

IP 54 / 23

**Use:** For public illumination of communications, pedestrian zones, gardens and parks, residential blocks.

**Technical description:** Body from polyamide. Optical cover from PC. Reflector from anodized Al sheet. Electric parts are fixed in the body. Type 444 30 71 is equipped with transistorized ballast Ecolum EC4-70. Luminaire is fixed on pole shaft or pole bracket  $\varnothing$  42 - 60 mm. Max. section of connecting conductors 2.5 mm<sup>2</sup>.

**Accessories** (on order): bracket 2-99.5581/1 or 3-99.10222 for fixing on wall, bracket 4-99.10230 for fixing on concrete pole.

Types	Recommended light source			Weight (kg)	Trans. ballast
444 30 10	HP sodium discharge lamp	NAV	100	4.3	-
444 30 12	HP mercury vapour lamp	HQL	125	4.0	-
444 30 12 P					
444 30 70	HP sodium discharge lamp	NAV	70		
444 30 70 P					EC4-70
444 30 71					

P = luminaire equipped with fuse 2 A.

