


C.CANLUX-A / MULTICAN-A



Input Power:
• 12,5W / 16,0VA (CBS)

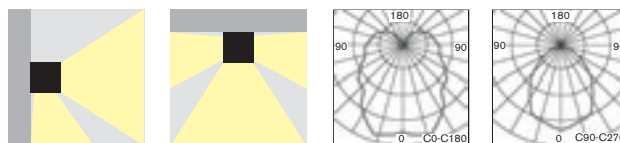

• Wall single sided or ceiling double sided (all TOP versions) emergency lighting fixture with perfect light distribution for non-maintained (NM), non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:

- **AUTOTEST** (-AT)
- **CENTRALTEST** (-ATXL) for ELMAX LOOK system (look up page No.166)
- **CENTRAL BATTERY** (C.CANLUX) for **non-addressable CBS** (look up also page No.174)

• Conforming to the requirement of EN60598-2-22, EN1838, EN62034

• Design:

- Body made of anodized extruded aluminum profile
- Diffuser made of acrylic with legend

• elegantné nástenné jednostranné alebo stropné obojstranné (všetky TOP verzie) výkonné núdzové svietidlo s perfektnou distribúciou svetla pre netrválne (NM) alebo pre trvalé/netrválne (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:

- **AUTOTEST** (-AT)
- **CENTRALTEST** (-ATXL) pre systém ELMAX LOOK (pozri str.166)
- **CENTRAL BATTERY** (C.CANLUX) pre **neadresovateľné CBS** (str.174)

• spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034

• konštrukcia:

- teleso z eloxovaného hliníkového profilu
- svetelno-činný kryt z PMMA s piktogramom

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- HighPower LEDs 120lm/W (5000K) with the lifetime >100.000h
- Addressable CENTRALTEST communication module (for ATXL, ATXP only)
- LEDs indicating both presence of power supply and signaling failures
- TEST button
- ceiling mounting bracket (only for all TOP versions)

- výkonné LED 120lm/W (5000K) so životnosťou min 100000hod
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL, ATXP verzie)
- signalizácia LED a TEST tlačítko
- stropná montážna základňa (len pre všetky TOP verzie)

OPTIONAL ACCESSORIES

PRÍPLATKY

- Acrylic diffuser with the legends (look up page No.307)
- Wall or ceiling mounting brackets
- Protective steel cage

- plexi difúzor s piktogramom (pozri str.307)
- nástenná, stropná alebo stropná závesná konzola
- ochranný kovový kôš




Accessory: Diffuser with Legend
Príplatkové plexi s piktogramom
(look up also next page)



Accessory: Mounting Accessories
Príplatkové konzoly (na požiadanie)

C.CANLUX-A / MULTICAN-A

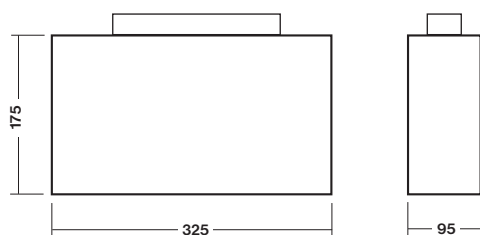

- Acrylic diffuser with the legend of type H,I,J,O complying ISO7010 (for all TOP versions are 2pcs needed because of double sided lighting fixture)
- **IT IS NOT INCLUDED IN STANDARD PACKAGE. IT MUST BE ORDERED AS SEPARATE ITEM !**
- Viewing Distance 36m
- Príplatkové plexi s piktogramom typu H,I,J,O v súlade s ISO7010 (pre verzie TOP je potrebné objednať 2ks/svietidlo - obojstranné svietidlo)
- **NIE JE SÚČASŤOU ŠTANDARDNÉHO BALENIA SVIETIDLA, MUSÍ BYŤ OBJEDNANÉ AKO SAMOSTATNÁ POLOŽKA !**
- rozoznateľnosť piktogramu 36m



Optional Item / Príplatok	Order Code / Objednáv.kód
Diffuser with picto "H" /plexi s piktogramom "H"	254-B-100-01-05
Diffuser with picto "I" /plexi s piktogramom "I"	254-B-100-02-05
Diffuser with picto "J" /plexi s piktogramom "J"	254-B-100-03-05
Diffuser with picto "O" /plexi s piktogramom "O"	254-B-100-04-01
Diffuser without picto /plexi bez piktogramu "X"	254-B-100-00-00
Diffuser with picto "Z1" /plexi s piktogramom "Z1"	on request / na požiadanie
Diffuser with picto "Z2" /plexi s piktogramom "Z2"	on request / na požiadanie

Page No.162

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTICAN-A-LED-AT.1h	NM/M	1h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/2,1Ah	254-B-09-01	1,2 kg
MULTICAN-A-LED-AT.3h	NM/M	3h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/4,0Ah	254-B-01-01	1,3 kg
MULTICAN-A-TOP-LED-AT.1h	NM/M	1h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/3,0Ah	254-B-10-01	1,3 kg
MULTICAN-A-TOP-LED-AT.3h	NM/M	3h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/4,0Ah	254-B-02-01	1,4 kg

Page No.166

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTICAN-A-LED-ATXL.1h	NM/M	1h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/2,1Ah	254-B-11-01	1,3 kg
MULTICAN-A-LED-ATXL.3h	NM/M	3h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/4,0Ah	254-B-12-01	1,4 kg
MULTICAN-A-TOP-LED-ATXL.1h	NM/M	1h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/3,0Ah	254-B-13-01	1,4 kg
MULTICAN-A-TOP-LED-ATXL.3h	NM/M	3h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/4,0Ah	254-B-14-01	1,5 kg

Page No.174

LED CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.CANLUX-A-LED 230V AC/DC	CBS NON-ADDRESSABLE	2x HighPower LED	240 lm	254-B-03-01	1,0 kg
C.CANLUX-A-TOP-LED 230V AC/DC	CBS NON-ADDRESSABLE	4x HighPower LED	400 lm	254-B-04-01	1,1 kg

Standard Line
Single Sided Wall Mounted Emergency Luminaire


C.CANLUX-A / MULTICAN-A




C.CANLUX-A-TOP / MULTICAN-A-TOP



C.CANLUX-B / MULTICAN-B

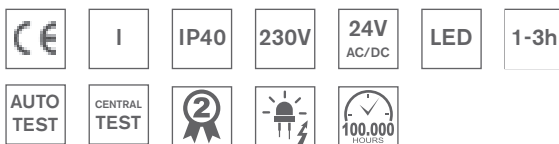

Input Power:
• 12,5W / 16,0VA (CBS)

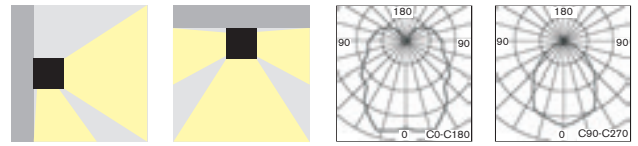

- Wall single sided or ceiling double sided (all TOP versions) emergency lighting fixture with perfect light distribution for non-maintained (NM), non-maintained/maintained (NM/M) or centralised (C) emergency lighting available in all following versions:
 - **AUTOTEST** (-AT)
 - **CENTRALTEST** (-ATXL) for ELMAX LOOK system (look up page No.166)
 - **CENTRAL BATTERY** (C.CANLUX) for **non-addressable CBS** (look up also page No.174)
- Conforming to the requirement of EN60598-2-22, EN1838, EN62034
- Design:
 - Body made of anodized extruded aluminum profile
 - Diffuser made of acrylic with legend
- elegantné nástenné jednostranné alebo stropné obojstranné (všetky TOP verzie) výkonné núdzové svietidlo s perfektnou distribúciou svetla pre netrválne (NM) alebo pre trvalé/netrválne (NM/M) alebo (C) centrálné napájané núdzové osvetlenie dostupné vo verziách pre:
 - **AUTOTEST** (-AT)
 - **CENTRALTEST** (-ATXL) pre systém ELMAX LOOK (pozri str.166)
 - **CENTRAL BATTERY** (C.CANLUX) pre **neadresovateľné CBS** (str.174)
- spĺňa požiadavky európskej normy EN 60598-2-22, EN1838, EN62034
- konštrukcia:
 - teleso z eloxovaného hliníkového profilu
 - svetelno-činný kryt z PMMA s piktogramom

STANDARD FEATURES

ŠTANDARDNÁ VÝBAVA

- HighPower LEDs 120lm/W (5000K) with the lifetime > 100.000h
- Addressable CENTRALTEST communication module (for ATXL, ATXP only)
- LEDs indicating both presence of power supply and signaling failures
- TEST button
- ceiling mounting bracket (only for all TOP versions)
- výkonné LED 120lm/W (5000K) so životnosťou min 100000hod
- adresovateľný CENTRALTEST komunikačný modul (len pre ATXL, ATXP verzie)
- signalizácia LED a TEST tlačítko
- stropná montážna základňa (len pre všetky TOP verzie)

OPTIONAL ACCESSORIES

PRÍPLATKY

- Acrylic diffuser with the legends (look up next page for further details)
- Wall or ceiling mounting brackets
- Protective steel cage
- plexi difúzor s piktogramom (viď ďalej ako objednať samostatne)
- nástenná, stropná alebo stropná závesná konzola
- ochranný kovový kôš




Accessory: Diffuser with Legend
Príplatkové plexi s piktogramom
(look up the next page)




Accessory: Mounting Accessories (on demand)
Príplatkové konzoly (na požiadanie)

C.CANLUX-B / MULTICAN-B

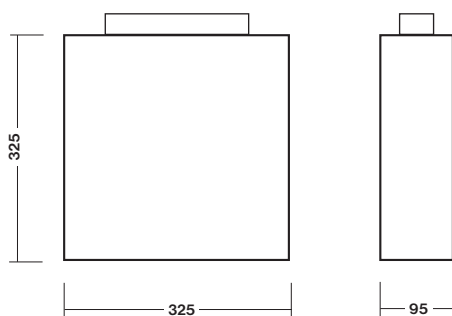

- Acrylic diffuser with the legend of type H,I,J,O complying ISO7010 (for all TOP versions are 2pcs needed because of double sided lighting fixture)
- **IT IS NOT INCLUDED IN STANDARD PACKAGE. IT MUST BE ORDERED AS SEPARATE ITEM !**
- Viewing Distance 70m
- Príplatkové plexi s piktogramom typu H,I,J,O v súlade s ISO7010 (pre verzie TOP je potrebné objednať 2ks/svietidlo - obojstranné svietidlo)
- **NIE JE SÚČASŤOU ŠTANDARDNÉHO BALENIA SVIETIDLA, MUSÍ BYŤ OBJEDNANÉ AKO SAMOSTATNÁ POLOŽKA !**
- rozoznatelnosť piktogramu 70m

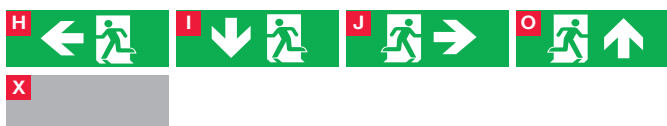

Optional Item / Príplatok	Order Code / Objednávací kód
Diffuser with picto "H" /plexi s piktogramom "H"	254-B-101-01-01
Diffuser with picto "I" /plexi s piktogramom "I"	254-B-101-02-06
Diffuser with picto "J" /plexi s piktogramom "J"	254-B-101-03-01
Diffuser with picto "O" /plexi s piktogramom "O"	254-B-101-04-01
Diffuser without picto /plexi bez piktogramu "X"	254-B-101-00-00

Page No.162

AUTOTEST -AT NM/M

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTICAN-B-LED-AT.1h	NM/M	1h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/2,1Ah	254-B-15-01	3,0 kg
MULTICAN-B-LED-AT.3h	NM/M	3h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/4,0Ah	254-B-08-01	3,1 kg
MULTICAN-B-TOP-LED-AT.1h	NM/M	1h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/3,0Ah	254-B-16-01	3,1 kg
MULTICAN-B-TOP-LED-AT.3h	NM/M	3h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/4,0Ah	254-B-07-01	3,2 kg

Page No.166

CENTRALTEST -ATXL ELMAX-LOOK

Type	Version	Duration	Light Source	Light Flux / Emergency mode	Battery	Order Code	Weight
MULTICAN-B-LED-ATXL.1h	NM/M	1h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/2,1Ah	254-B-17-01	3,0 kg
MULTICAN-B-LED-ATXL.3h	NM/M	3h	2x HighPower LED	240 lm / 240 lm	NiMh 4,8V/4,0Ah	254-B-18-01	3,1 kg
MULTICAN-B-TOP-LED-ATXL.1h	NM/M	1h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/3,0Ah	254-B-19-01	3,1 kg
MULTICAN-B-TOP-LED-ATXL.3h	NM/M	3h	4x HighPower LED	400 lm / 220 lm	NiMh 4,8V/4,0Ah	254-B-20-01	3,2 kg

Page No.174

LED CENTRAL BATTERY (CBS)

Type	Version	Light Source	Light Flux	Order Code	Weight
C.CANLUX-B-LED 230V AC/DC	CBS NON-ADDRESSABLE	2x HighPower LED	240 lm	254-B-05-01	2,4 kg
C.CANLUX-B-TOP-LED 230V AC/DC	CBS NON-ADDRESSABLE	4x HighPower LED	400 lm	254-B-06-01	2,5 kg